



### OPERATING MODES

The fixture has four different operating modes: Basic RGBW, Basic RGBW 16bit, Extended RGBW and Extended RGBW 16bit.

The Basic mode has the single colour control of the LEDs, while the Extended mode has the possibility to control different section of the Leds so is possible to manage independently the colours of the external ring and the central led.

**NOTE:** The DMX map for the WW version is the same as the standard model.

**IMPORTANT:** To Unlock the display press the buttons sequence UP – DOWN – UP – DOWN – ENTER.

### DMX MODES

<i>DMX Mode</i>	<i>Number of Parameter</i>	<i>Colour Control</i>	<i>Notes</i>
Basic RGBW	13	RGBW 8bit	Colour control as single layer.
Basic RGBW 16bit	17	RGBW 16bit	Colour control in as single layer.
Extended RGBW (Default setting)	17	RGBW 8bit	Colour control for the external ring and central led.
Extended RGBW 16bit	25	RGBW 16bit	Colour control for the external ring and central led.

**IMPORTANT:** The Extended RGBW is the operating mode as default setting.

### DMX list


<i>DMX Parameter number</i>	<i>RGBW Mode</i>	<i>RGBW 16bit Mode</i>	<i>Extended RGBW Mode</i>	<i>Extended RGBW 16bit Mode</i>
1	Red	Red	Red ring led	Red ring led
2	Green	Red fine	Green ring led	Red ring led fine
3	Blue	Green	Blue ring led	Green ring led
4	White	Green fine	White ring	Green ring led fine
5	CTO	Blue	Red central led	Blue ring led
6	Macro color	Blue fine	Green central led	Blue ring led fine
7	Strobe effect	White	Blue central led	White ring led
8	Dimmer	White fine	White central led	White ring led fine
9	Dimmer fine	CTO	CTO	Red central led
10	Zoom	Macro color	Macro color	Red central led fine
11	Colour Crossfade	Strobe effect	Strobe effect	Green central led
12	Function	Dimmer	Dimmer	Green central led fine
13	Reset	Dimmer fine	Dimmer fine	Blue central led
14	-	Zoom	Zoom	Blue central led fine
15	-	Colour Crossfade	Colour Crossfade	White central led
16	-	Function	Function	White central led fine
17	-	Reset	Reset	CTO
18	-	-	-	Macro color
19	-	-	-	Strobe effect
20	-	-	-	Dimmer
22	-	-	-	Dimmer fine
22	-	-	-	Zoom
23	-	-	-	Colour Crossfade
24	-	-	-	Function
25	-	-	-	Reset

## Function details


RGBW	RGBW 16bit	Extended RGBW	Extended RGBW 16bit	Bit Value	Function
1	1	-	-	0 - 255	<b>RED</b> Linear Red colour
-	2	-	-	0 - 255	<b>RED FINE (16 Bit)</b> Red colour fine control
2	3	-	-	0 - 255	<b>GREEN</b> Linear Green colour
-	4	-	-	0 - 255	<b>GREEN FINE (16 Bit)</b> Green colour fine control
3	5	-	-	0 - 255	<b>BLUE</b> Linear Blue colour
-	6	-	-	0 - 255	<b>BLUE FINE (16 bit)</b> Blue colour fine control
4	7	-	-	0 - 255	<b>WHITE</b> Linear White colour
-	8	-	-	0 - 255	<b>WHITE FINE (16 bit)</b> White colour fine control
-	-	1	1	0 - 255	<b>RED Ring</b> Linear Red colour of the ring
-	-	-	2	0 - 255	<b>RED FINE Ring</b> Red colour fine control of the ring
-	-	2	3	0 - 255	<b>GREEN Ring</b> Linear Green colour of the ring
-	-	-	4	0 - 255	<b>GREEN FINE Ring</b> Green colour fine control of the ring
-	-	3	5	0 - 255	<b>BLUE Ring</b> Linear Blue colour of the ring
-	-	-	6	0 - 255	<b>BLUE FINE Ring</b> Blue colour fine control of the ring

RGBW	RGBW 16bit	Extended RGBW	Extended RGBW 16bit	Bit Value	Function
-	-	4	7	0 - 255	<b>WHITE Ring</b> Linear White colour of the ring
-	-	-	8	0 - 255	<b>WHITE FINE Ring</b> White colour fine control of the ring
-	-	5 to 8	9 to 15	0 - 255	<b>RGBW Central led</b> Red (5 – 9) – Green (6 – 11) – Blue (7 - 13) – White (8 - 15) linearly colour of the central led.
-	-	-	10 to 16	0 - 255	<b>RGBW Central led</b> Red (10) – Green (12) – Blue (14) – White (16) colour central led fine control.
5	9	9	17		<b>CTO</b> Colour Temperature control 8000K to 2700K Values 6500K to 2500K for WW version <b>Important:</b> The CTO parameter has priority on the colour functions.
				0-9 10-255	Unused range 8000 K – 2700K (6500K -2500K for WW version)
6	10	10	18	0 - 255	<b>MACRO COLOR</b> See chart page 7 for colours details. <b>Important:</b> The Macro Color parameter has priority on the colour functions.
7	11	11	19		<b>STROBE EFFECT</b>
				0 - 3	Closed
				4 - 103	Strobe effect from low (1Hz) to fast (25Hz)
				104 - 107	Open
				108 - 207	Linearly pulsation from slow (0.5 Hz) to fast (25 Hz)
				208 - 212	Open
				213 - 225	Random Slow Strobe effect
226 - 238	Random Medium Strobe effect				
239 - 251	Random Fast Strobe effect				
252 - 255	Open				
8	12	12	20	0 - 255	<b>DIMMER</b> Linearly dimmer control
9	13	13	21	0 - 255	<b>DIMMER FINE (16 bit)</b> Fine dimmer control

RGBW	RGBW 16bit	Extended RGBW	Extended RGBW 16bit	BIT Value	Function				
10	14	14	22	0 - 255	<b>ZOOM</b> Linearly Zoom				
11	15	15	23	0 - 255	<b>COLOUR CROSSFADE</b> Crossfade time from fast to slow				
11	15	15	23		<b>FUNCTION</b> <b>Important:</b> The setting are activated and saved holding the DMX level for three seconds.				
				0 - 11	Unused range				
				12 - 17 18 - 24 25 - 31 32 - 37	Auto (Default) SLN Constant Theatre	→ Fan mode settings			
				38 - 42 43 - 47 48 - 52 53 - 55 56 - 57	Dimmer curve 1 (Default) Dimmer curve 2 Dimmer curve 3 Dimmer curve 4 Dimmer curve 5	Details at page 6			
				58 - 62 63 - 67 68 - 72	Raw color channels gamma 1 Raw color channels gamma 1.5 Raw color channels gamma 2.2 (Default)	Details at page 6			
				73 - 77 78 - 82	Colour calibration Off (Default) Colour calibration adjustment				
				83 - 167	Not used				
				168-188 189-199 200-210 211-221 222-232 233-243	PWM frequency=600Hz PWM frequency=1200Hz PWM frequency=2000Hz (Default) PWM frequency=4000Hz PWM frequency=6000Hz PWM frequency=25000Hz				
				244-248 249-253	Display OFF (Default) Display ON				
				254-255	Default function recall				
				12	16	16	24		<b>RESET</b>
								0 - 25	Unused range
26 - 76	Reset: The reset sequence is activated passing through the unused levels range and staying in this range for 5 seconds								
77 - 255	Not used								

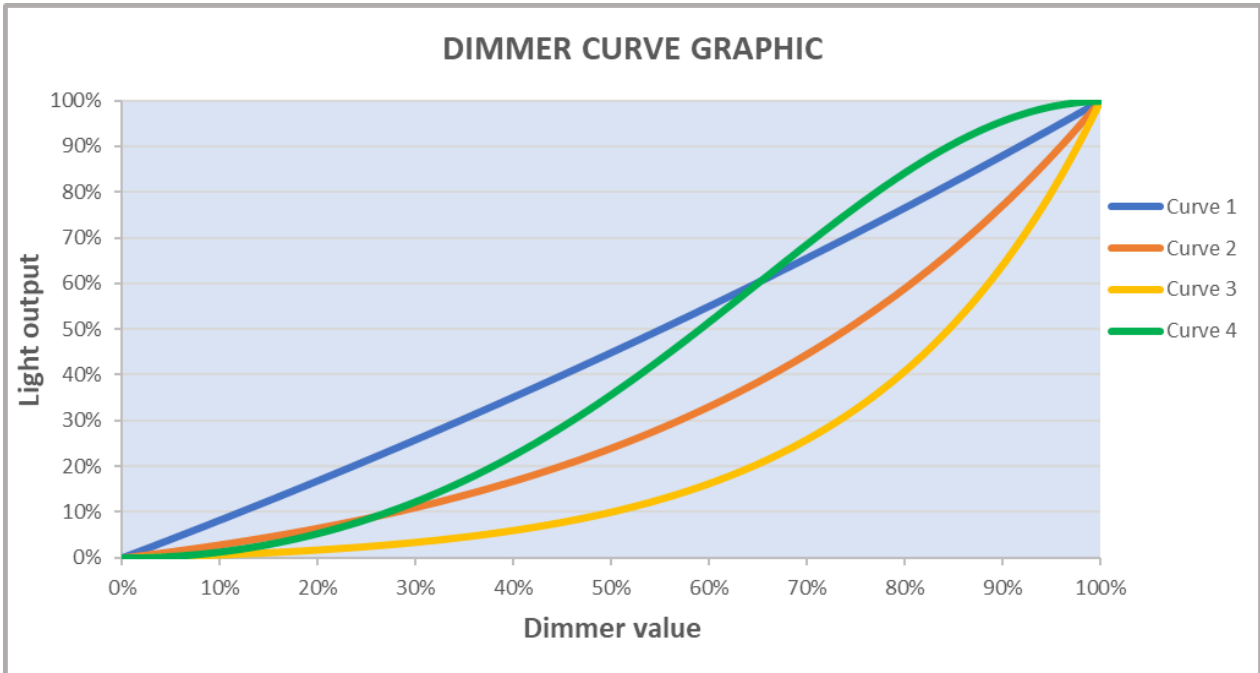

**IMPORTANT NOTE:** Dimmer Curve 5 has all the Leds synchronized, for balanced behavior in white.

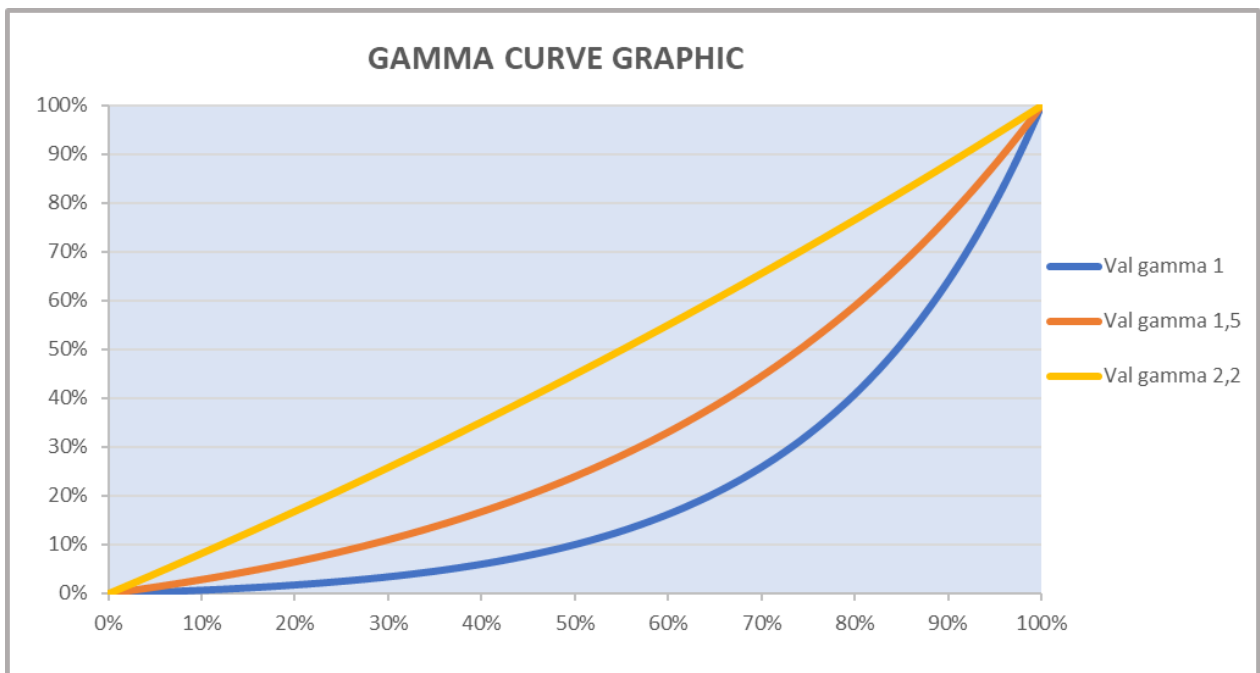

### MACRO COLOR

Bit value	LEE Filter reference	Function	Bit value	LEE Filter reference	Function
0-9	--	Macro Color OFF	126	116	Med Blu Green
10	--	Red	127	117	Steel Blue
11	--	Green	128	118	Light Blue
12	--	Blue	129-130	119	Dark Blue
13	--	Cyan	131-133	121	Leaf Green
14	--	Yellow	134-135	124	Dark Green
15	--	Magenta	136-137	126	Mauve
16	--	White 7000K	138-141	128	Bright Pink
17	--	White 3700K	142-144	132	Medium Blue
18	--	White 5000K	145	135	Deep Golden Amber
19	--	Black	146	136	Pale Lavender
20-22	10	Medium Yellow	147-148	137	Special Lavender
23-26	13	Straw Tint	149-150	139	Primary Green
27-28	17	Surprise Peach	151-156	141	Bright Blue
29	19	Fire	157-161	147	Apricot
30	20	Medium Amber	162-167	152	Pale Gold
31	21	Gold Amber	168-171	158	Deep Orange
32-34	22	Dark Amber	172-173	162	Bastard Amber
35-44	25	Sunrise Red	174	164	Flame Red
45	35	Light Pink	175-178	165	Daylight Blue
46-48	36	Medium Pink	179	169	Lilac Tint
49-61	39	Pink Carnation	180-183	170	Deep Lavender
62-67	52	Light Lavender	184-190	174	Dark Steel Blue
68-77	58	Lavender	191-206	181	Congo Blue
78-88	68	Sky Blue	207	197	Alice Blue
89-99	79	Just Blue	208	--	Dirty White
100-109	90	Dark Yellow Green	209-255	--	White
110-111	100	Spring Yellow			
112	102	Light Amber			
113	103	Straw			
114	104	Deep amber			
115-116	105	Orange			
117	107	Light Rose			
118	108	English Rose			
119	109	Light Salmon			
120	110	Middle Rose			
121-122	111	Dark Pink			
123-124	113	Magenta			
125	115	Peacock Blue			